

- / rectangular 2.7 m
- / longitudinal draft counter
- / 4 open-up sales flaps
- / fits in high cube container

2700



Bar and Event Trailer

Handling

Opening/closing 1 person app. 5 min.

Weights


Gross vehicle weight max.	1.300 kg
Tare weight basic type app.	950 kg
Payload basic type app.	350 kg

Dimensions

Overall (without roof display) app.	3.960 x 2.060 x 2.600 mm
Rectangular sales area app.	2.700 x 2.000 mm
Interior standing height app.	2.100 mm
Covered sales area app.	5.400 x 4.660 mm
Surrounding counter length app.	11.500 mm
Longitudinal draft counter app.	2.560 x 500 mm

Standard features

hot galvanized chassis with single axle, straight V drawbar, EU standard overrunning and parking brake, 12 V EU standard lighting system, reinforced jockey wheel and support legs, complete bodywork with roof and open-up flaps made of insulated sandwich panels, entrance door at the rear, PEKI Alustar all-aluminium system floor, 2 step interior and folding counters with optimum working and guest height, surrounding guest counters in rounded design, foldable table over drawbar, longitudinal draft counter on the left with brushed NCS covering with sink, cold water tap and drip tray, longitudinal working counter on the right with space for max. 2 bottle chest coolers or refrigerators, 230 V 16 A basic electric system with German standard plugs, supply for fresh and used water with connections PVC corner covers, ...

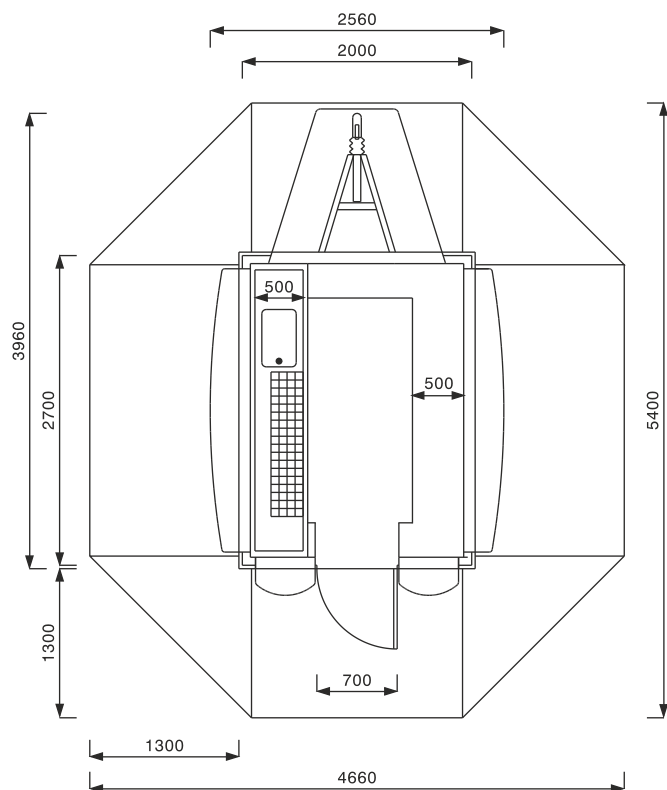

Also available with fixed front or side wall and arched roof. All weights and dimensions are app., in basic version as described above and according DIN 70020. We reserve the right for changes and modifications without prior notice. Pictures show special equipment. Errors and omissions reserved.

© PEKI 2021



Typ 2700 KD with arched roof

