

- / octangular 4.5 m
- / foldable
- / central draft counter
- / 4 open-up sales flaps

4500/8



Bar and Event Trailer

Handling

Opening/closing 1 person app. 10 min.

Weights


Gross vehicle weight max.	2.620 kg
Tare weight basic type app.	2.000 kg
Payload basic type app.	620 kg

Dimensions

Overall (without roof display) app.	6.620 x 2.550 x 2.900 mm
Octagonal sales area app.	4.450 x 3.950 mm
Interior standing height app.	2.260 mm
Covered sales area app.	7.450 x 6.200 mm
Surrounding counter length app.	20.500 mm
Central draft counter app.	1.300 x 2.260 mm

Standard features

hot galvanized chassis with single axle, height adjustable drawbar, EU standard overrunning and parking brake, 12 V EU standard lighting system, reinforced jockey wheel and support legs, stainless steel corner posts, bodywork hot galvanized covered with aluminum sheets, entrance door at the rear, PEKI Alustar all-aluminum system floor, PEKI space saving one hand lifting system for the foldable side extensions, PEKI all-aluminum system roof, insulated sandwich roof panel and open-up flaps, surrounding guest counters in rounded design, foldable table over drawbar, foldable tables at the rear, space for max. 2 bottle chest coolers at the front, reinforced all-aluminum central draft counter, brushed NCS covering with 2 sinks, cold water taps and drip trays, 230 V 16 A basic electric system with German standard plugs, supply for fresh and used water with connections, PVC corner covers, ...

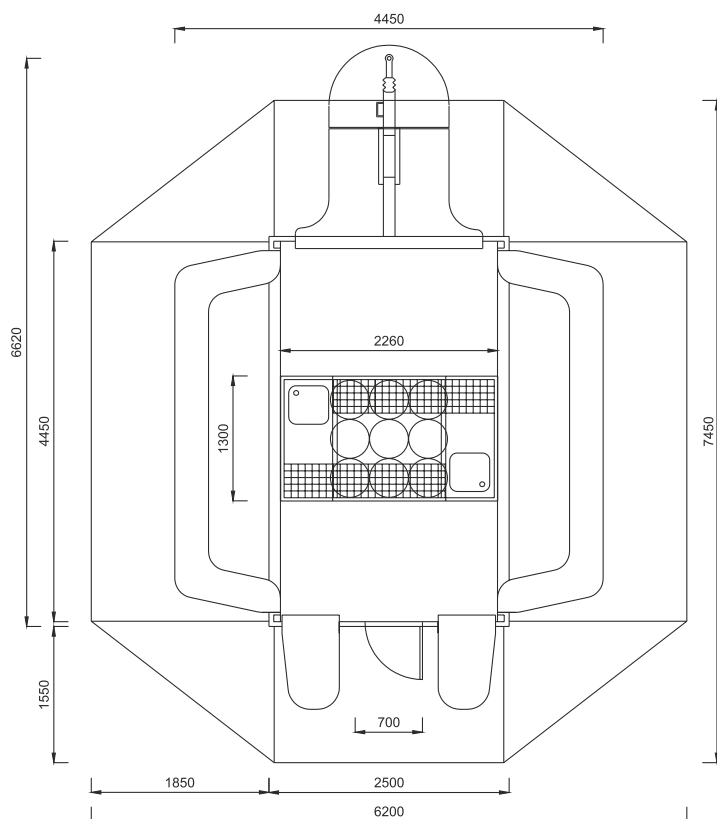

Also available with arched roof and cooled central draft counter. All weights and dimensions are app., in basic version as described above and according DIN 70020. We reserve the right for changes and modifications without prior notice. Pictures show special equipment. Errors and omissions reserved. © PEKI 2023



Arched roof (option)

